


## PU IND C 0,4

Light weight and very flexible spiral hose made of polyurethane

|                     |                                                                                                                            |
|---------------------|----------------------------------------------------------------------------------------------------------------------------|
| <b>Applications</b> | extractions arms, filter systems, grass extraction, wood dust extraction, leaf extraction                                  |
| <b>Structure</b>    | Polyether-Polyurethane, transparent, steel wire / spring steel wire / not coated / copper plated                           |
| <b>Temperature</b>  | -40°C up to 100°C, short term up to 125°C                                                                                  |
| <b>Properties</b>   | very good flexibility, compressible, good abrasion resistance, hydrolysis & microbe resistant, free of halogen & softeners |

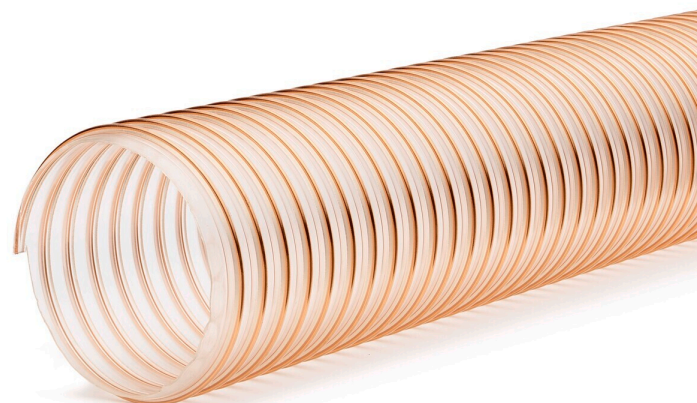

| Inner Diameter (mm) | Outer Diameter (mm) | Wall Thickness (mm) | Bending Radius (mm) | Max. Operating Pressure (bar) | Vacuum Max. (bar) | Total Weight per Piece (kg) | Length (m) | Article Number |
|---------------------|---------------------|---------------------|---------------------|-------------------------------|-------------------|-----------------------------|------------|----------------|
| 40                  | 44,00               | 0,40                | 24                  | 0,50                          | 0,25              | 2,06                        | 10         | NU52104000K    |
| 51                  | 55,00               | 0,40                | 31                  | 0,45                          | 0,20              | 2,57                        | 10         | NU52105100K    |
| 60                  | 64,00               | 0,40                | 36                  | 0,40                          | 0,16              | 3,00                        | 10         | NU52106000K    |
| 80                  | 84,00               | 0,40                | 48                  | 0,28                          | 0,10              | 3,94                        | 10         | NU52108000K    |
| 100                 | 105,00              | 0,40                | 60                  | 0,20                          | 0,09              | 4,65                        | 10         | NU52110000K    |
| 120                 | 125,00              | 0,40                | 72                  | 0,20                          | 0,08              | 5,55                        | 10         | NU52112000K    |
| 140                 | 145,00              | 0,40                | 84                  | 0,15                          | 0,06              | 6,45                        | 10         | NU52114000K    |
| 150                 | 155,00              | 0,40                | 90                  | 0,10                          | 0,06              | 6,90                        | 10         | NU52115000K    |
| 160                 | 165,00              | 0,40                | 96                  | 0,09                          | 0,06              | 7,35                        | 10         | NU52116000K    |
| 180                 | 185,00              | 0,40                | 108                 | 0,09                          | 0,06              | 8,25                        | 10         | NU52118000K    |
| 200                 | 206,00              | 0,40                | 120                 | 0,08                          | 0,05              | 9,87                        | 10         | NU52120000K    |
| 250                 | 256,00              | 0,40                | 150                 | 0,05                          | 0,04              | 12,26                       | 10         | NU52125000K    |