


## AQUALIFE KTW TPE

<b>Applications</b>	drinking water, beverage production & conveying
<b>Structure</b>	TPE/E, blue, opaque, cross braid
<b>Temperature</b>	-30°C up to 70°C, short term up to 90°C
<b>Properties</b>	hydrolysis & microbe resistant, weather proof, high pressure resistance, crush-resistant, smooth inside, smooth outside
<b>Norms</b>	DVGW W 270

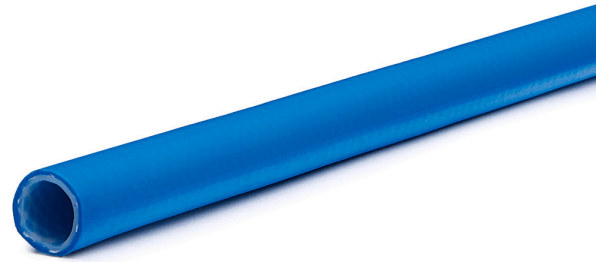

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
10	15,40	2,50	70	14,00	42,00	0,09000	2,25	25	NS61101000P
10	15,40	2,50	70	14,00	42,00	0,09000	4,50	50	NS61101000R
13	18,80	3,00	70	15,00	45,00	0,14120	3,53	25	NS61101300P
13	18,80	3,00	70	15,00	45,00	0,14100	7,05	50	NS61101300R
19	26,60	4,10	130	15,00	45,00	0,23200	5,80	25	NS61101900P
19	27,20	4,10	130	15,00	45,00	0,23200	11,60	50	NS61101900R
25	34,60	4,80	220	10,00	30,00	0,40720	10,18	25	NS61102500P
25	34,60	4,80	220	10,00	30,00	0,40700	20,35	50	NS61102500R