


S 5 PUR SX EL

Heavy duty and flexible Polyurethane ducting, electrically conductive

Applications	extraction systems, conveying of abrasive media, conveying technology, granulate conveying, powder conveying & -coating
Structure	TPU / Polyether-Polyurethane, black / jet black (similar RAL 9005), opaque, steel wire / spring steel wire / not coated / copper plated
Temperature	-40°C up to 90°C
Properties	very good abrasion resistance, very smooth inside, corrugated outside, good oil & petrol resistance, hydrolysis & microbe resistant, electrically conductive ($R \leq 10^8 \text{ Ohm}$)
Norms	TRBS 2153/TRGS 727, ATEX 2014/34/EU / aspiration (no zone or inside: zone 22), ATEX 2014/34/EU / pneumatic transport of combustible dusts (inside: zone 20, 21, 22)

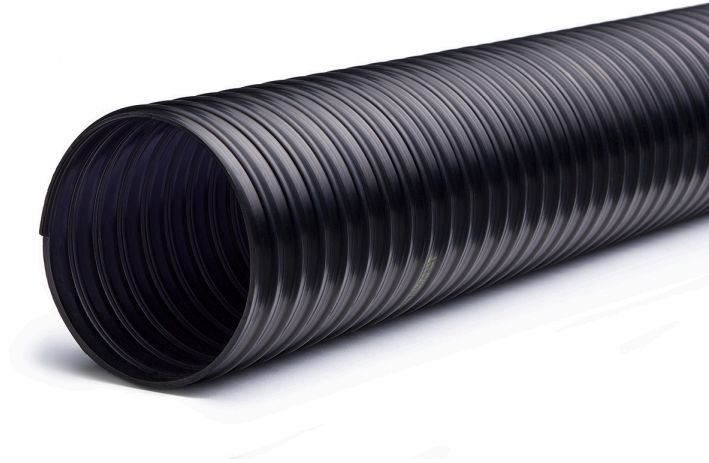

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
40	48,00	1,40	40	2,88	0,70	4,49	10	ND54504000K
40	48,00	1,40	40	2,88	0,70	6,74	15	ND54504000M
51	59,00	1,40	51	2,38	0,60	6,56	10	ND54505100K
51	59,00	1,40	51	2,38	0,60	9,84	15	ND54505100M
60	68,00	1,40	60	2,25	0,55	7,65	10	ND54506000K
60	68,00	1,40	60	2,25	0,55	11,48	15	ND54506000M
65	73,00	1,40	65	2,15	0,55	0,00	10	ND54506500K
65	73,00	1,40	65	2,15	0,55	0,00	15	ND54506500M
76	84,00	1,40	76	1,75	0,50	9,47	10	ND54507600K
76	84,00	1,40	76	1,75	0,50	14,21	15	ND54507600M
80	88,00	1,40	80	1,50	0,45	15,12	15	ND54508000M
80	88,00	1,40	80	1,50	0,45	10,08	10	ND54508000K
102	111,00	1,40	102	1,21	0,40	12,31	10	ND54510200K
102	111,00	1,40	102	1,21	0,40	18,47	15	ND54510200M
125	134,00	1,40	125	0,88	0,25	0,00	10	ND54512500K
125	134,00	1,40	125	0,88	0,25	0,00	15	ND54512500M
140	149,00	1,40	140	0,77	0,20	16,69	10	ND54514000K
140	149,00	1,40	140	0,77	0,20	25,03	15	ND54514000M
152	162,00	1,40	152	0,77	0,20	21,98	10	ND54515200K
152	162,00	1,40	152	0,77	0,20	32,97	15	ND54515200M
160	170,00	1,40	160	0,66	0,20	34,65	15	ND54516000M
160	170,00	1,40	160	0,66	0,20	23,10	10	ND54516000K

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
180	190,00	1,40	180	0,55	0,15	0,00	10	ND54518000K
180	190,00	1,40	180	0,55	0,15	0,00	15	ND54518000M
200	211,00	1,40	200	0,55	0,15	29,95	10	ND54520000K
200	211,00	1,40	200	0,55	0,15	44,92	15	ND54520000M
250	261,00	1,40	250	0,38	0,10	37,23	10	ND54525000K